(72) Inventor: Huovila, Jyrki
Paavalinvuorentie 32
SF-40950 Muurama (FI)
Inventor: Ilmoniemi, Erkki
Havuperä 11
SF-40800 Vaajakoshi (FI)
Inventor: Odell, Michael
Käsikivi 6B
SF-40640 Jyväskylä (FI)
Inventor: Suonperä, Antti
Naavatie 11
SF-40530 Jyväskylä (FI)

(74) Representative: Pellmann, Hans-Bernd,
Dipl.-Ing.
Patentanwaltsbüro
Tiedtke-Bühling-Kinne & Partner
Bavariaring 4
D-80336 München (DE)

(54) Stock feed system for a multi-layer headbox and method in the operation of a multi-layer headbox.

(57) The invention concerns a stock feed system for a multi-layer headbox (10) and a method in the operation of a multi-layer headbox. According to the invention, into each inlet header (11,12,13) of the multi-layer headbox (10), a stock concept (M_1, M_2...) is passed which has been produced out of the same fresh stock (M) by to the fresh stock adding the necessary chemicals and fillers.
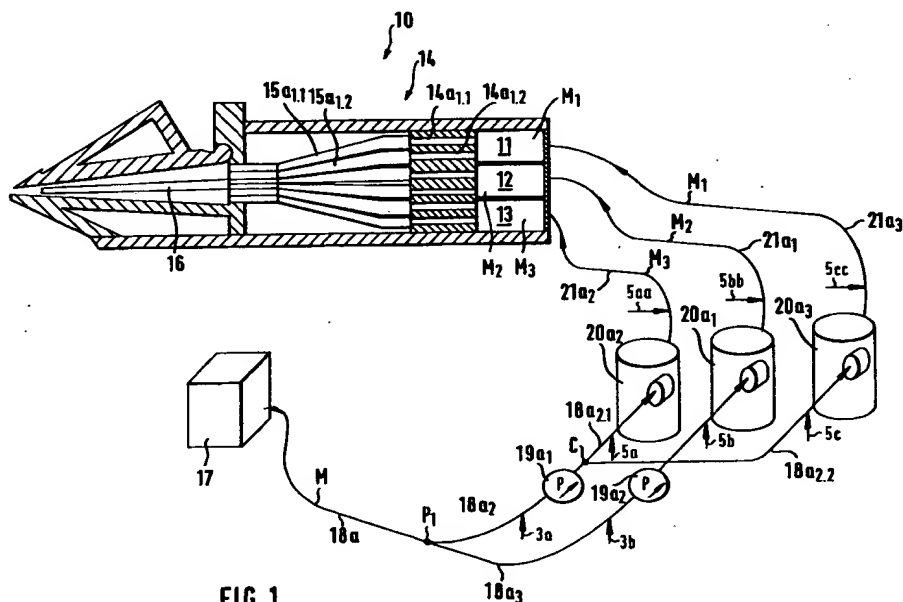
FIG.1

The invention concerns a stock feed system for a multi-layer headbox and a method in the operation of a multi-layer headbox.

In the prior art, systems for the operation of multi-layer headboxes are known in which there are separate fresh stocks for the surface layers and for the middle layers. Thus, in the prior-art systems, there have been at least double fresh-stock systems for the formation of the layers. In the solutions of equipment, the stocks introduced along separate fresh-stock lines have been processed in vortex cleaning and in de-aeration tanks, and in the system, into said at least two fresh-stock lines, feeds of fillers or starch complying with the required paper grade have been passed.

In the present application, it is suggested that, in a paper machine that comprises a multi-layer headbox and therein at least two separate inlet headers or equivalent, for the inlet headers, separate stocks are prepared out of the same fresh stock and from the same stock tank. According to the invention, the fresh stock passed out of the stock tank is divided into two or more component flows. Into said component flows to be fed into the multi-layer headbox, the chemicals and/or additives purposeful for the quality or the economy of production of different paper grades are passed.

The stock system in accordance with the invention for a multi-layer headbox is mainly characterized in that, into each inlet header of the multi-layer headbox, a stock concept is passed which has been produced out of the same fresh stock by to the fresh stock adding the necessary chemicals and fillers.

The method in accordance with the invention is mainly characterized in that, in the method, the stock for each header is prepared out of one and the same fresh stock by to said fresh stock adding the necessary chemicals and fillers.

The invention will be described in the following with reference to some preferred embodiments of the invention illustrated in the figures in the accompanying drawing, the invention being, yet, not supposed to be confined to said embodiments alone.

Figure 1 shows a first preferred embodiment of the invention, in which the stock flow passed out of the fresh-stock tank is divided into three component flows, which are passed further, after feeds of chemicals and fillers, into the different inlet headers in the multi-layer headbox.

Figure 2 shows a second preferred embodiment of the stock feed system in accordance with the invention for a multi-layer headbox.

Fig. 1 is a schematic illustration of a first preferred embodiment of the invention, which is favourably suitable for SC-paper. As is shown in the figure, the multi-layer headbox 10 comprises three inlet headers, i.e. the inlet headers 11, 12 and

13. From the inlet header 11, the stock is passed through the distribution manifold $14a_{1.1}$, $14a_{1.2}$... to the turbulence generator 15 into its turbulence tubes $15a_{1.1}$, $15a_{1.2}$... and further into the slice cone 16. From the inlet header 12, the stock M_2 is passed through the distribution pipes $14a_{2.1}$, $14a_{2.2}$... of the distributor manifold 14 to the turbulence generator 15 into its turbulence tubes $15a_{2.1}$, $15a_{2.2}$..., further into the slice cone 16, and from the inlet header 13 the stock M_3 is passed through the distribution pipes $14a_{3.1}$, $14a_{3.2}$... of the distributor manifold 14 to the turbulence generator 15 into its turbulence tubes $15a_{3.1}$, $15a_{3.2}$... and further into the slice cone 16. Thus, by means of the multi-layer headbox shown in Fig. 1, the paper is formed out of three stock concepts M_1, M_2 and M_3. Thus, the web will comprise three layers formed out of different stock concepts.

It is an essential feature of the solution of the present invention that the equipment comprises a single stock system, the stocks M_1, M_2 and M_3 being formed out of the same fresh stock M. While there were several fresh-stock lines in the prior-art solutions, in the method and the solution of equipment in accordance with the present invention, different layers are formed out of the same fresh stock M, which is passed out of the same fresh-stock tank 17. In the way that is shown in Fig. 1, the fresh stock M is passed out of the fresh-stock tank 17 along the line 18a and is branched at the branching point P_1 into two branch lines $18a_2$ and $18a_3$. In the embodiment of Fig. 1, in the branch line $18a_2$ the chemical 3a is added to the stock M, and in the branch line $18a_3$ the chemical 3b, such as a filler or starch, is added. In the lines $18a_2$, $18a_3$, the stocks are made to flow further by means of the pumps $19a_1$ and $19a_2$ so that, along the line $18a_2$, the stock is passed into the machine screen $20a_1$. The retention agent 5b is fed into the stock before the machine screen $20a_1$, and the retention agent 5bb after the machine screen. In this way, good mixing of the retention agent and the stock is achieved. Along the line $21a_1$, the stock M_2 that was formed is passed into the middle inlet header 12 of the multi-layer headbox.

From the line $18a_2$ after the pump $19a_1$, from the branch point C, the line $18a_{2.1}$ passes to the machine screen $20a_2$, and from the machine screen $20a_2$ the line $21a_2$ passes to the multi-layer headbox. At the front side of the machine screen $20a_2$, the retention agent 5a is fed into the line $18a_{2.1}$, and after the machine screen $20a_2$ the retention agent 5aa is fed into the line $21a_2$. Along the line $21a_2$ the stock flow M_3 is passed into the inlet header 13 of the multi-layer headbox.

From the branch point C, the line $18a_{2.2}$ passes to the machine screen $20a_3$ and further into the multi-layer headbox. Into the line $18a_{2.2}$, before the

machine screen $20a_3$, the retention agent 5c is fed, and after the machine screen $20a_3$ the retention agent 5cc is fed. Along the line $21a_3$, the stock flow M_1 is passed into the inlet header 11 of the multi-layer headbox.

Fig. 2 shows an embodiment of the invention in which one unified stock flow M is passed out of the stock tank 17 along the line $22a_1$ to the branch point D_1. After the branch point D_1, the chemical 3a' is added to the fresh stock M into the line $220a_1$. By means of the pump $19a_1$' the stock is made to flow further into the machine screen $23a_1$, and before the machine screen $23a_1$, the retention agent 5a' is added, and after the machine screen $23a_1$ the retention agent 5aa'. The stock M_3' flow is passed along the line $24a_1$ into the inlet header 13 of the multi-layer headbox.

From the branch point D_1 the stock M is made to flow along the line $22a_1$ to the branch point D_2, from which the stock M is branched into the lines $220a_2$ and $220a_3$. Into the line $220a_2$ the chemical 3b', such as filler or starch, is added into the stock M before the pump $19a_2$'. By means of the pump $19a_2$' said concept is passed further into the machine screen $23a_2$. Before the machine screen $23a_2$ the retention agent 5b', such as some suitable chemical, is added to the stock, and after the machine screen $23a_2$ the retention agent 5bb'. The stock concept M_2' produced in this way is passed further along the line $24a_2$ into the multi-layer headbox, into its middle inlet header 12.

Similarly, from the branch point D_2 the stock M is passed along the line $220a_3$, after the feed of chemical 3c', by means of the circulation produced by the pump $19a_3$', into the machine screen $23a_3$, before which the retention agent 5c' is added, and after which the retention agent 5cc' is added, and the concept M_1' thereby produced is passed further along the line $24a_3$ into the inlet header 11 of the multi-layer headbox 10.

Thus, in the concept in accordance with the invention, just a single circulation of stock is used, in which there is just one starting fresh stock M. Said fresh stock M is processed further by to it adding chemicals and fillers, whereby out of one fresh stock M all the necessary different stock concepts M_1, M_2 and M_3 are obtained for the inlet headers 11,12 and 13 of the multi-layer headbox.

The invention concerns a stock feed system for a multi-layer headbox (10) and a method in the operation of a multi-layer headbox. According to the invention, into each inlet header (11,12,13) of the multi-layer headbox (10), a stock concept (M_1, M_2 ...) is passed which has been produced out of the same fresh stock (M) by to the fresh stock adding the necessary chemicals and fillers.

Claims

1. Stock feed system for a multi-layer headbox (10), **characterized** in that, into each inlet header (11,12,13) of the multi-layer headbox (10), a stock concept (M_1,M_2...) is passed which has been produced out of the same fresh stock (M) by to the fresh stock adding the necessary chemicals and fillers.

2. Stock feed system as claimed in claim 1, **characterized** in that the system comprises one single fresh stock tank only, and from said tank a fresh stock line ($18a_1$;$22a_1$), which is branched into different lines in accordance with the requirements of each particular concept.

3. Method in the operation of a multi-layer headbox, which comprises at least two inlet headers (11,12...) for stock, a stock concept (M_1,M_2;M',M'') of its own being passed into each of said headers and the stock being made to flow out of said headers further through a system of distributor pipes into a turbulence generator and further into the slice cone, **characterized** in that, in the method, the stock (M_1,M_2...;M',M''...) for each header is prepared out of one and the same fresh stock (M) by to said fresh stock (M) adding the necessary chemicals and fillers.

4. Method as claimed in claim 3, **characterized** in that, in the method, one single fresh stock tank (17) is used, out of which the stock (M) is made to flow through branch points into different lines, a chemical being fed into each of said lines in accordance with the requirements of the particular stock concept to be fed into the inlet header of the multi-layer headbox.
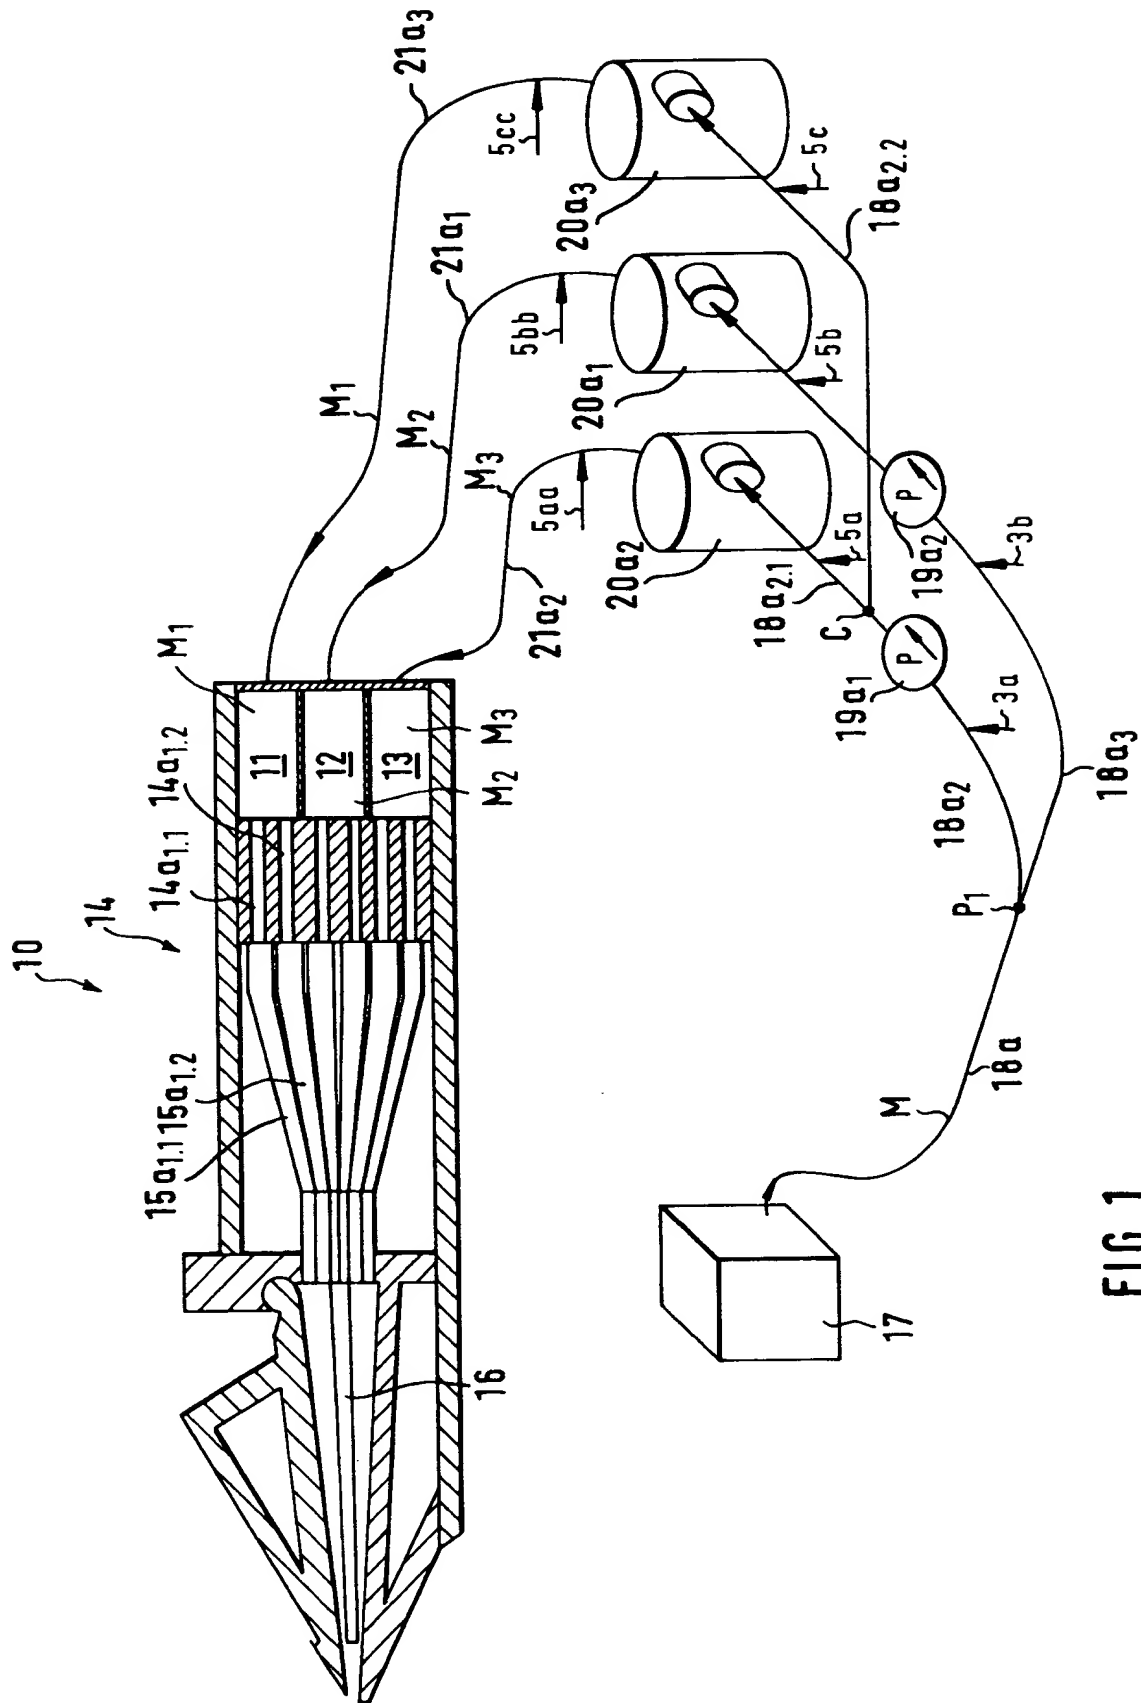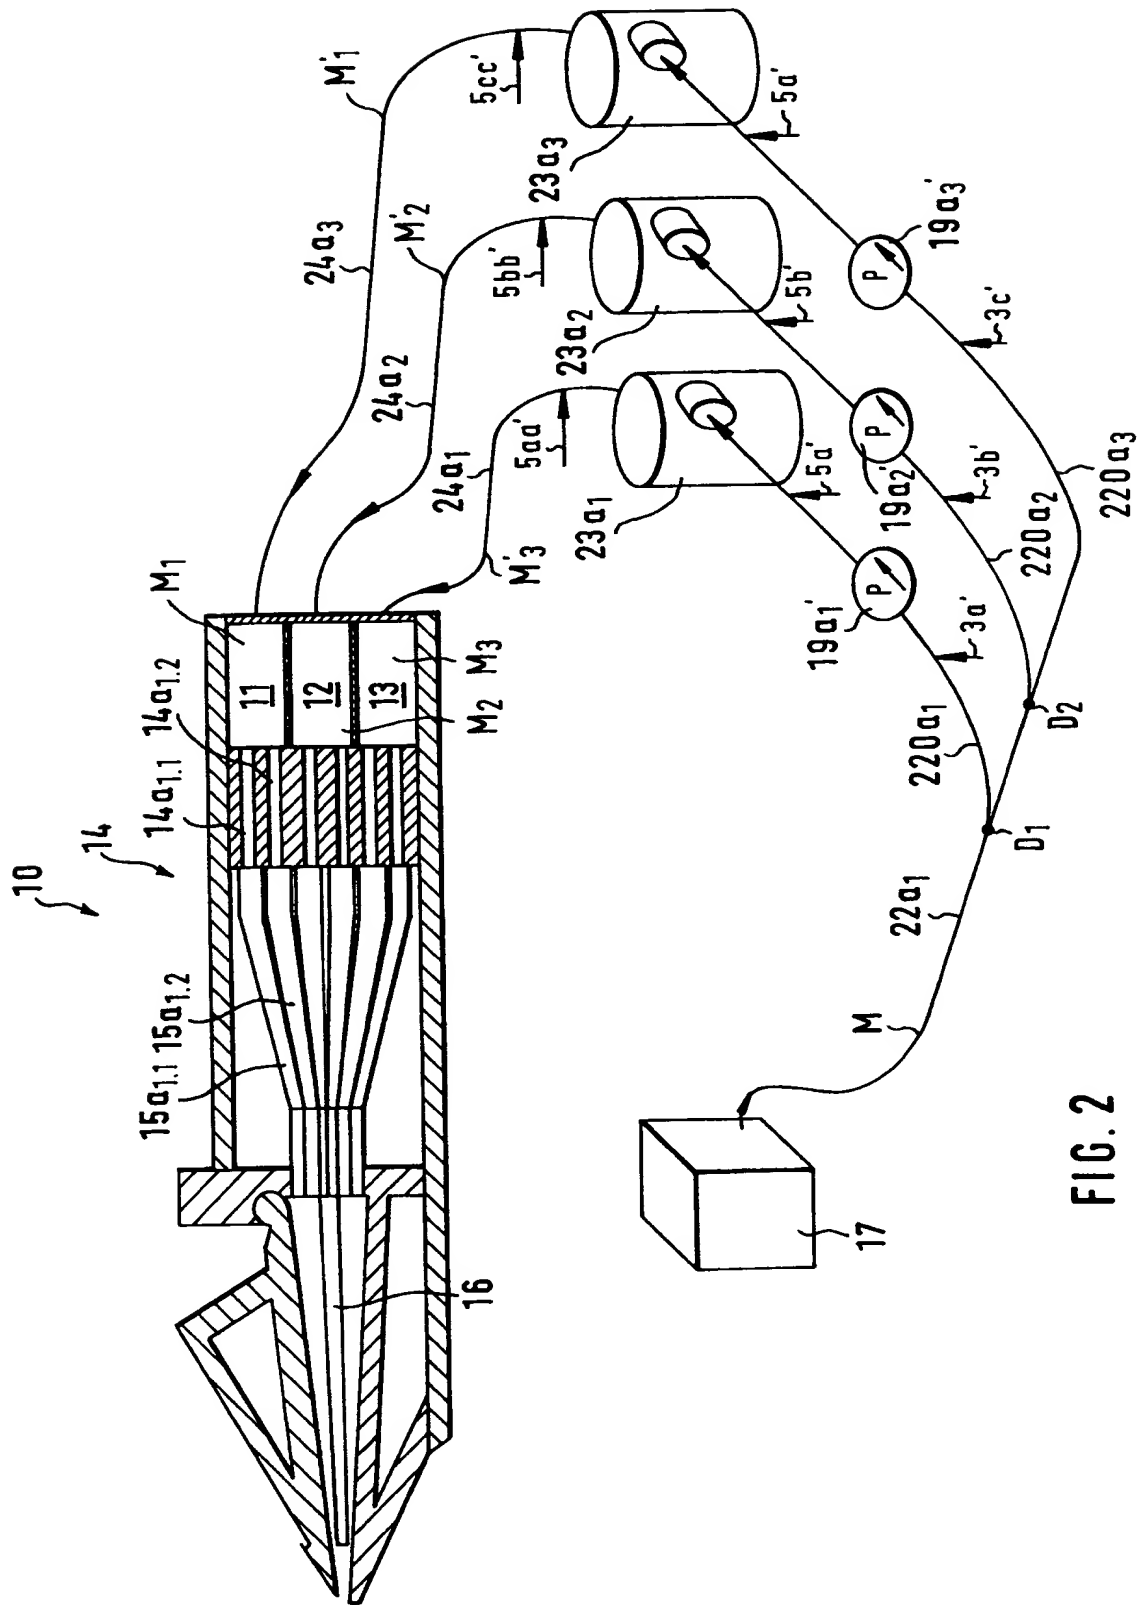
FIG.1

FIG. 2

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	US-A-4 021 295 (SCHMAENG) * the whole document *	1-4	D21F9/00 D21F11/04
Y	US-A-2 315 892 (L. M. BOOTH) * the whole document *	1-4	
A	DE-A-37 20 618 (VALMET OY) * the whole document *	1-4	
A	US-A-3 833 465 (CAMPBELL) * the whole document *	1-4	

TECHNICAL FIELDS
SEARCHED (Int.Cl.6)

D21F

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
THE HAGUE	22 December 1994	De Rijck, F

EPO FORM 1503 03.82 (P04C01)